

July 2016

Description


Moore Industries' universal PSD PC-Programmable Loop Display features a large integral display that shows real-time process status in mA, percent, or any designated 5-character Engineering units (EGU).

Superior Accuracy—The loop-powered PSD reads any 4-20mA signal and displays the information with phenomenal accuracy of $\pm 0.012\%$ of input scale. And because it requires less than 2.3 Volts, it won't burden most loops.

Simple and Versatile PC Setup Program—Using the PC software, the PSD can either be custom scaled to display in a percent or scaled directly into engineering units for indicating process measurements such as pressure, temperature, level, or flow. Span, zero, input range, display range, and filtering frequency can also be easily programmed. Our software will even capture the input range limits of the loop to provide you with the most accurate display available.

Easy Calibration—A single button on the front of the unit allows you to easily calibrate your loop by displaying the loop current in mA with three-decimal-place accuracy.

Figure 1. The PSD is available complete in our BH housing; an explosion-proof enclosure that protects your display in even the harshest field environments.

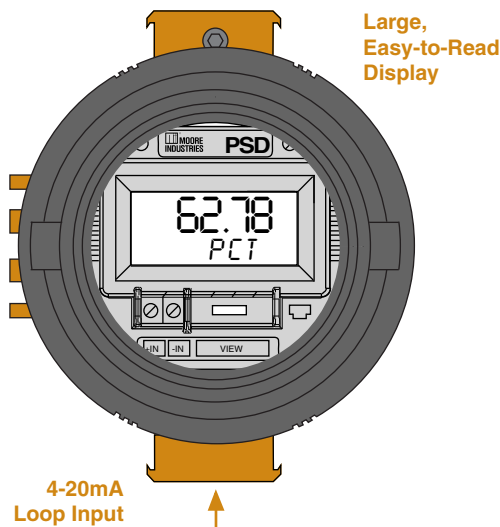

Installing easily on the loop, the PSD is protected to NEMA 4X and IP66 standards by our rugged D-BOX enclosure. Explosion-proof enclosures are also available.

Features

- **Easy-to-read, customizable display.** The PSD's independently configured display features two rows of large characters that can be clearly read in the field and set to display any EGU.
- **360°, flexible mounting.** When placed into one of our rugged enclosures, the PSD can be mounted at any angle in nearly any environment.
- **Low voltage drop.** Loop-powered by less than 2.3 Volts, the PSD can even be installed on burdened loops.
- **Custom and square root curves.** Select a square root or linear curve from the library, or create your own. Use our software to input a table in one EGU and have the PC program convert it into a different EGU for display.
- **RFI/EMI immunity.** The PSD is resistant to the harmful, unpredictable effects of radio frequency and electromagnetic interference.

Certifications



PSD

PC-Programmable
Loop Display

Specifications

Display Type: LCD; Top Row, 10mm (0.4 in) high black digits on a reflective background; Bottom Row, 6mm (0.23 in) high black digits on a reflective background Format: Top row is five alphanumeric characters plus sign and decimal point; Bottom row is five alphanumeric characters Range: -99999 to 99999 Display Update Rate: 100msec Minimum Display Span: 1.00	Performance (Continued) <table border="1"> <tr> <td>Stability</td> <td colspan="3">Input to Output</td> </tr> <tr> <td>Year(s)</td> <td>1</td> <td>3</td> <td>5</td> </tr> <tr> <td>mA</td> <td>0.08</td> <td>0.14</td> <td>0.18</td> </tr> </table> Resolution: 0.0028% of input scale Over-Current Protection: 100mA, maximum Display Input Overage: 24mA Digital Input Filter: User-programmable; 50 or 60Hz Minimum Operating Current: ≥3.8mA Burden: <2.3VLP (<5.1VLP when -LMD Loop Maintenance Zener Diode option is installed and PSD is removed from the loop)	Stability	Input to Output			Year(s)	1	3	5	mA	0.08	0.14	0.18	Ambient Conditions (Continued) Relative Humidity: 0-95%, non-condensing Ambient Temperature Effect: ±0.015% of span per °C change, maximum RFI/EMI Immunity: 20V/m when tested according to SAMA 33.1 abc with 0.5% of span or less error. 20V/m@ 80-1000MHz, 1kHz AM, when tested according to IEC1000-4-3-1995 Common Mode Rejection: 100dB@60Hz Normal Mode Rejection: 30dB@60Hz
		Stability	Input to Output											
Year(s)	1	3	5											
mA	0.08	0.14	0.18											
Performance Accuracy: ±0.012% of input scale. This includes the combined effects of linearity, hysteresis, repeatability, and adjustment resolution. It does not include ambient temperature effect. Stability: Error is in % of maximum span:	Ambient Conditions Operating Range: -25°C to 85°C (-13°F to 185°F) Storage Range: -45°C to 85°C (-49°F to 185°F)	Weight BH housing: 1.37kg (3 lbs, 1.1 oz) D-BOX housing: 640g (1 lb, 6.3 oz) HP-style housing: 150g (5.3 oz) SB Housing: 2.6kg (7 lbs)												

Ordering Information

Unit	Input	Output	Power	Options	Housings
PSD PC-Programmable Loop Display	4-20MA Loop Input	PRG Program-mable with supplied configuration software to display a percent or any other EGU of up to 5 characters in length.	2.3VLP Loop Powered	-LMD Loop Maintenance Zener Diode provided at input terminals allowing the PSD to be removed from the loop without interrupting loop continuity (Burden: increases from <2.3 to <5.1VLP when PSD is removed from the loop) -ISC: CSA Approved Intrinsically-Safe & Non-Incendive -ISE: ATEX Approved Intrinsically-Safe -ISF: FM Approved Intrinsically-Safe & Non-Incendive -VTD: Standard Factory Calibration with NIST Test Data Report	BH2NG* (*) or (‡) Aluminum 2-Hub, Explosion-Proof enclosure with two, ½-inch NPT entry ports and a glass cover BH2TG* (*) or (‡) Aluminum 2-Hub, Explosion-Proof enclosure with two, ¼-inch NPT entry ports and a glass cover BH2MG* (*) or (‡) Aluminum 2-Hub, Explosion-Proof enclosure with two, M20 x 1.5 entry ports and a glass cover BH3NG* (*) or (‡) Aluminum 3-Hub, Explosion-Proof enclosure with three, ½-inch NPT entry ports and a glass cover BH3TG* (*) or (‡) Aluminum 3-Hub, Explosion-Proof enclosure with two, ¼-inch NPT side-entry ports, one ½-inch NPT bottom-entry port, and a glass cover BH3MG* (*) or (‡) Aluminum 3-Hub, Explosion-Proof enclosure with two, M20 x 1.5 side-entry ports, one ½-inch bottom-entry port, and a glass cover D1LC 1-Hub, Low base, Clear cover, NEMA 4X (IP66) enclosure D2LC 2-Hub, Low base, Clear cover, NEMA 4X (IP66) enclosure HP Hockey-puck housing and spring clips DN Snap-in mounting for HP case on TS-32 DIN rail FL Mounting flanges on HP suitable for relay track or screw mounting FLD Mounting flanges on HP suitable for 3½" relay track or screw mounting SB2NG* (*) or (‡) 316 Stainless Steel 2-Hub, Explosion-Proof enclosure with two, ½-inch NPT entry ports and a glass cover SB2MG* (*) or (‡) 316 Stainless Steel 2-Hub, Explosion-Proof enclosure with two, M20 x 1.5 entry ports and a glass cover <small>* Either A or E suffix (comes supplied with 2" pipe mount hardware) A suffix indicates ANZEx/TestSafe (Ex d) Flameproof approvals (i.e. BH2MGA) E suffix indicates ATEX (Ex d and tb) Flameproof approvals (i.e. BH2MGE) ‡ P suffix indicates enclosure comes equipped with base plate and U-bolts for mounting on a 2-inch pipe (i.e. BH2NGP) See BH, SB and D-BOX Datasheets for additional information.</small>

To order, specify: Unit / Input / Output / Power / Options [Housing]

Model Number Example: PSD / 4-20MA / PRG / 2.3VLP / -LMD [BH2NG]

Certifications

PSD-HP



FM Approvals (FM Global Group):
Intrinsically-Safe
 Class I, II, III Division 1, Groups A thru G
Non-Incendive
 Class I, Division 2, Groups A, B, C & D
Temperature Class T4 @ 85°C Ambient



CSA Group (Canadian Standards Association):
General/Ordinary Location
Intrinsically-Safe
 Class I, Division 1, Groups A, B, C & D
Non-Incendive
 Class I, Division 2, Groups A, B, C & D
Temperature Code T5 @ 60°C Ambient
Temperature Code T6 @ 40°C Ambient



ATEX Directive 2014/34/EU (LCIE):
Intrinsically-Safe
 II 1G Ex ia IIC T4 Ta = 85°C
ATEX Directive 2014/34/EU (MII):
 Ⓢ Type "n"
 II 3G Ex nA IIC T4 Ta = 85°C



CE Conformant:
 EMC Directive 2014/30/EC – EN 61326



PSD-HP in BH/SB2 Housing

FM Approvals (FM Global Group):
Explosion-Proof & Dust/Ignition-Proof
 Class I, Division 1, Groups A*, B, C & D
 Class II & III, Division 1, Groups E, F & G
Environmental Protection: NEMA 4X & IP66
 T6 @ 60°C Maximum Operating Ambient
**For Group A applications, seal all conduits within 18"*




CSA Group (Canadian Standards Association):
Explosion-Proof
 Class I, Division 1, Groups A*, B, C & D
 Class II, III, Groups E, F & G
 Type 4X, IP66
 Ambient Temp. Range: -20°C to +60°C; T6
**For U.S. Group A applications, seal all conduits within 18"*



ATEX Directive 2014/34/EU (ISseP):
Explosion/Flame-Proof
 Ⓢ II G Ex d IIC T6 Gb
 Ⓢ II D Ex tb IIIC Db T85°C IP66

ANZEx ANZEx (TestSafe):
Explosion/Flame-Proof
 Ex d IIC T6 (Tamb 60°C)

Figure 2. Dimensions of the PSD in the BH explosion-proof enclosure.

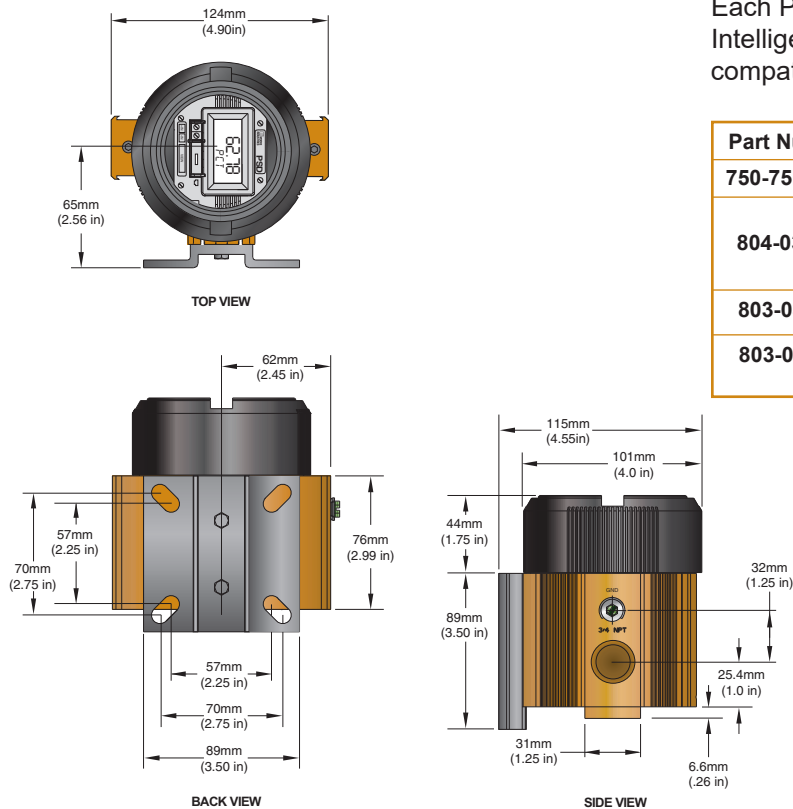

Accessories

Each PSD order comes with one copy of our Intelligent PC Configuration Software (Windows® compatible) To order additional software or cables:

Part Number	Part
750-75E05-01	Intelligent PC Configuration Software
804-030-26	Fuse Protected, Non-Isolated USB Communication Cable (required by ATEX for products installed in Intrinsically-Safe areas)
803-039-26	Isolated Configuration Cable (9-pin Serial Port)
803-040-26	Non-Isolated Configuration Cable (9-pin Serial Port)

PSD

PC-Programmable
Loop Display

Figure 3. Dimensions of the PSD in the D-BOX enclosure.


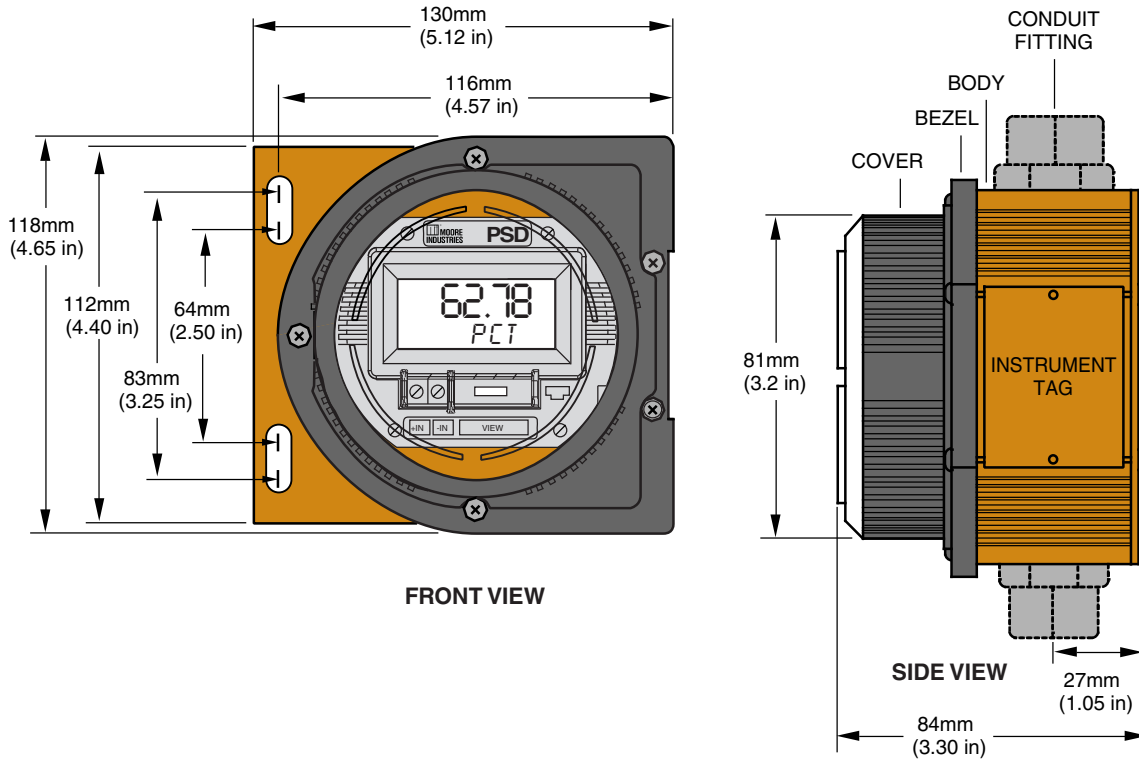


Figure 4. Dimensions of the PSD HP housing with mounting flanges.

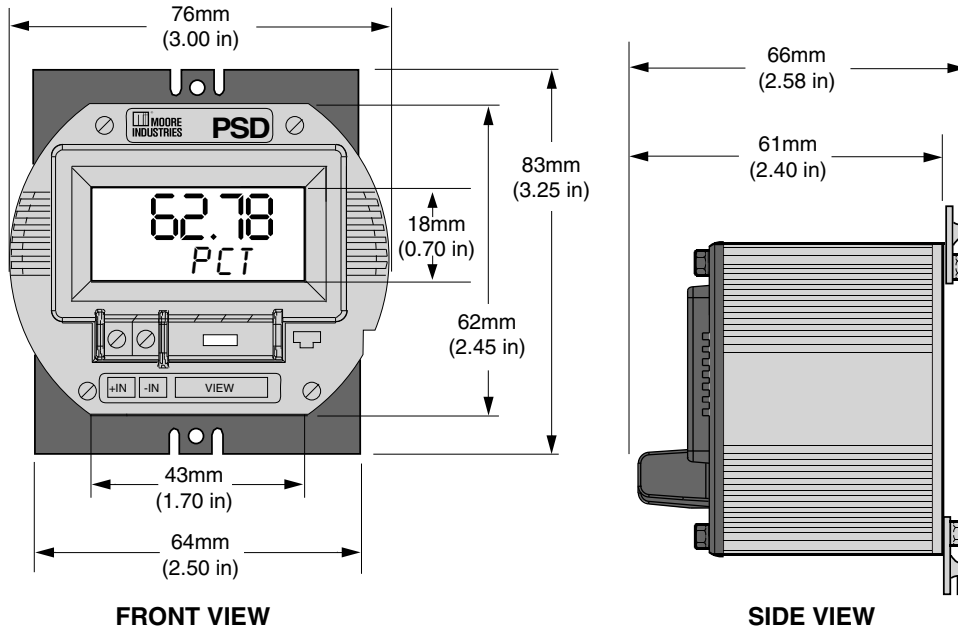

Demand Moore Reliability • www.miinet.com

United States • info@miinet.com
Tel: (818) 894-7111 • FAX: (818) 891-2816
Australia • sales@mooreind.com.au
Tel: (02) 8536-7200 • FAX: (02) 9525-7296

Belgium • info@mooreind.be
Tel: 03/448.10.18 • FAX: 03/440.17.97
The Netherlands • sales@mooreind.nl
Tel: (0)344-617971 • FAX: (0)344-615920

China • sales@mooreind.sh.cn
Tel: 86-21-62491499 • FAX: 86-21-62490635
United Kingdom • sales@mooreind.com
Tel: 01293 514488 • FAX: 01293 536852